

GÜÇLÜ BİR GELECEK İÇİN STRONGER FOR THE FUTURE



www.activent.com.tr



ACTIVENT®

ÜRÜN KATALOĞU
PRODUCT CATALOGUE



AYYP

7 KANATLI METAL PERVELNİ
DİREKT AKUPLE MOTORLU, DAİRESEL KASALI

7 WING METAL PROPELLER CIRCULAR
FRAME FANS

AYYP duvar ve pencereye montaj imkanı olan bu fanlar güçlü hava akımı sağlarlar. Düşük ses seviyeleri ve yüksek verimleri ile ekonomik fanlardır.

MALZEME

Gövdesi ve pervanesi elektrostatik toz boyalı sacdan mamuldür.

HIZ KONTROLÜ

Opsiyonel olarak frekans inverteri ile sağlanabilir.

KULLANIM ALANLARI

Fabrikalar, depolar, boyahaneler, imalathaneler vb. büyük hacimli yerlerin havalandırılması için kullanılır.

AYYP these fans which can be mounted on the walls and windows provide a strong air flow. They are economic fans with low sound levels and a high productivity.

MATERIAL

Its body and fan are made of electrostatic powder-coated steel plate.

SPEED CONTROL


It can be supplied with optional frequency inverters.

USAGE AREAS

It is used for the ventilation of large volume locations like factories, warehouses, paint shops, workshops, etc.







Tip/Kod Type/Code	Elektrik Motoru / Electrical Motor				Max. Debi Air Flow (m ³ / h)
	Voltaj Voltage	Güç Power		Devir Speed	
	(V)	(HP)	(kW)	(d/d) (rpm)	
AYYP-300-0,33-T-4K	380	0,33	0,25	1.350	2.500
AYYP-350-0,33-T-4K	380	0,33	0,25	1.350	3.000
AYYP-400-0,33-T-4K	380	0,33	0,25	1.350	3.500
AYYP-450-0,50-T-4K	380	0,50	0,37	1.380	4.000
AYYP-500-0,50-T-4K	380	0,50	0,37	1.380	6.000
AYYP-550-1,00-T-4K	380	1,00	0,75	1.410	7.500
AYYP-600-1,00-T-4K	380	1,00	0,75	1.410	9.500
AYYP-650-1,50-T-4K	380	1,50	1,10	1.430	11.000
AYYP-700-2,00-T-4K	380	2,00	1,50	1.430	12.000
AYYP-750-3,00-T-4K	380	3,00	2,20	1.435	14.000
AYYP-800-4,00-T-4K	380	4,00	3,00	1.435	18.000

TEKNİK ÖLÇÜLER / TECHNICAL DIMENSION

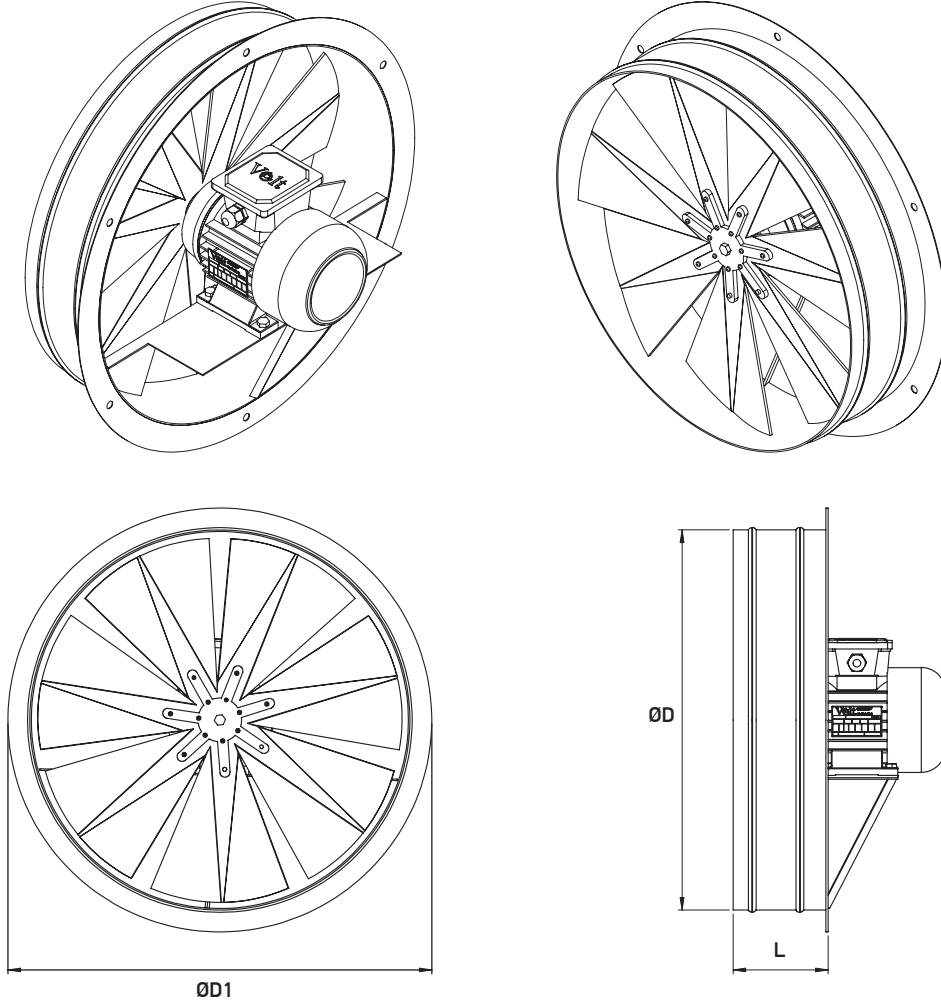






Tip/Kod Type/Code	Ölçüler / Sizes (mm)		
	ØD	ØD1	L
AYYP-300-0,33-T-4K	300	370	130
AYYP-350-0,33-T-4K	350	420	130
AYYP-400-0,33-T-4K	400	470	130
AYYP-450-0,50-T-4K	450	520	130
AYYP-500-0,50-T-4K	500	570	150
AYYP-550-1,00-T-4K	550	620	150
AYYP-600-1,00-T-4K	600	670	150
AYYP-650-1,50-T-4K	650	720	200
AYYP-700-2,00-T-4K	700	770	200
AYYP-750-3,00-T-4K	750	820	200
AYYP-800-4,00-T-4K	800	870	200

TEKNİK ÖLÇÜLER / TECHNICAL DIMENSION

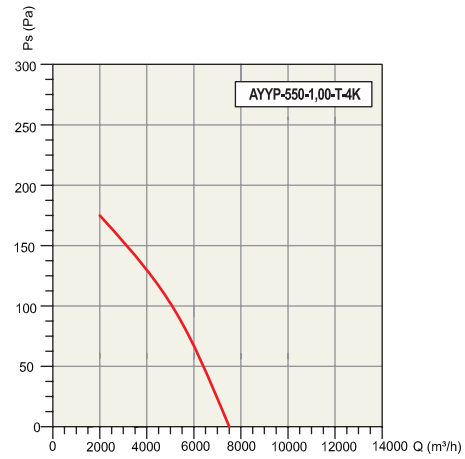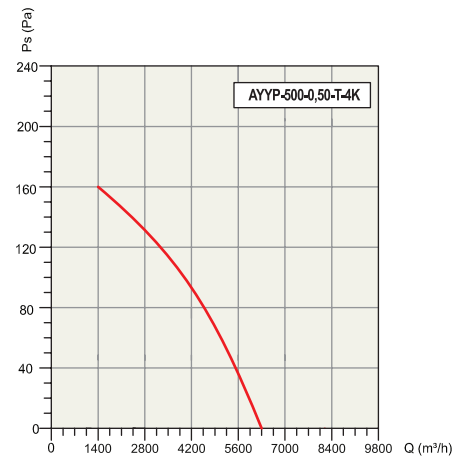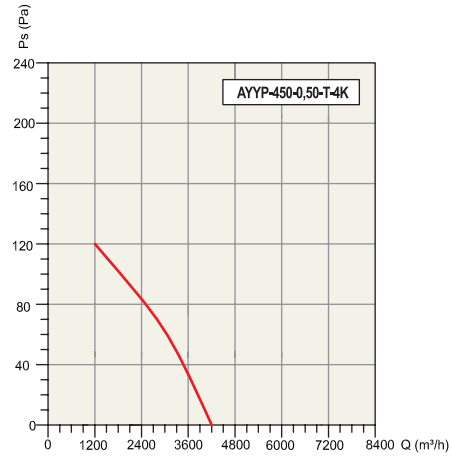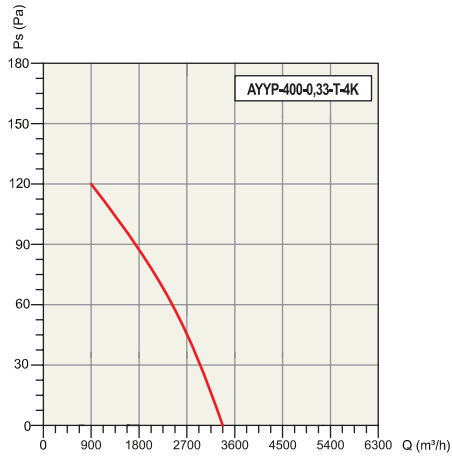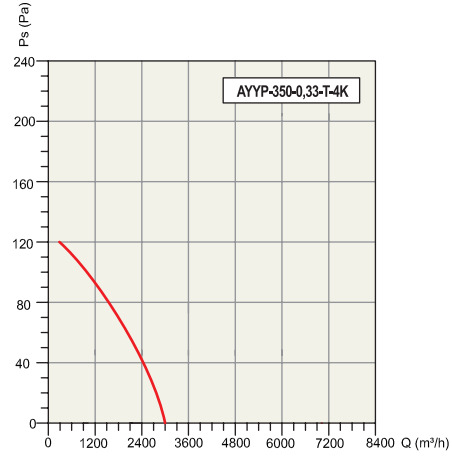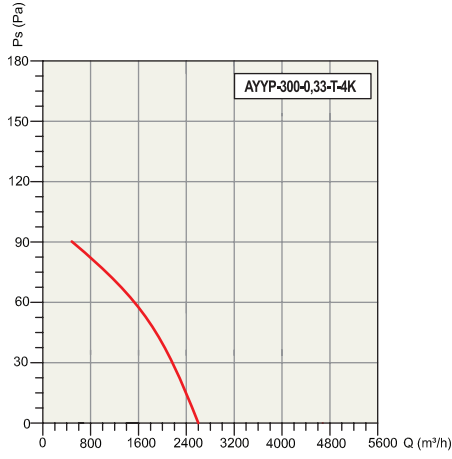



TEKNİK ÖLÇÜLER / TECHNICAL DIMENSION

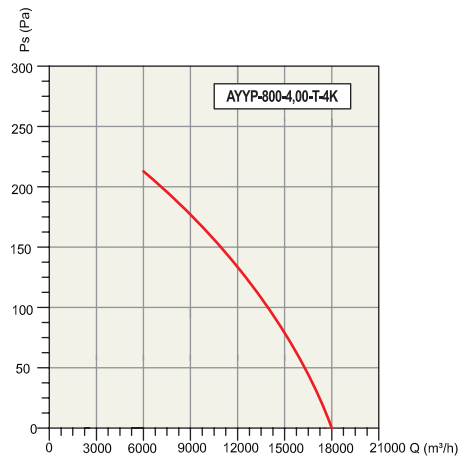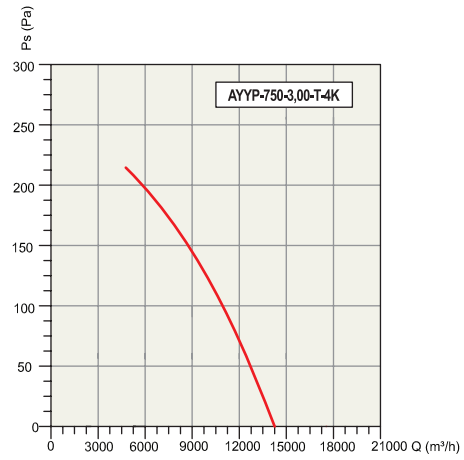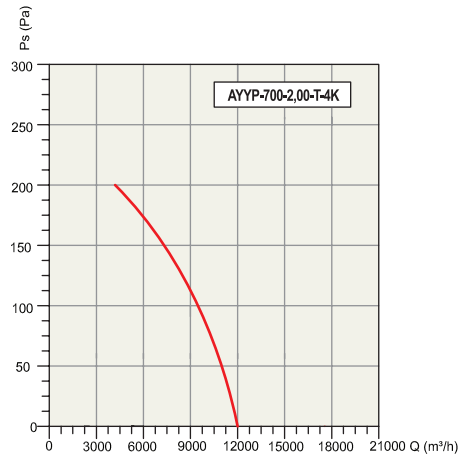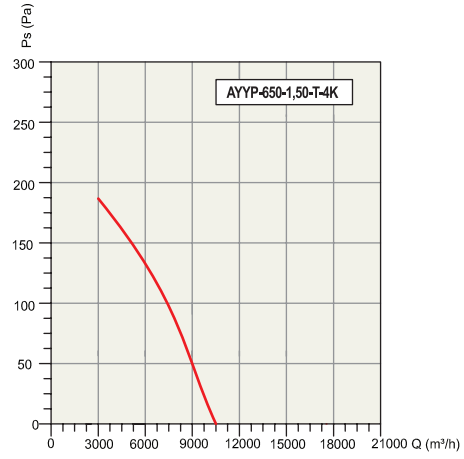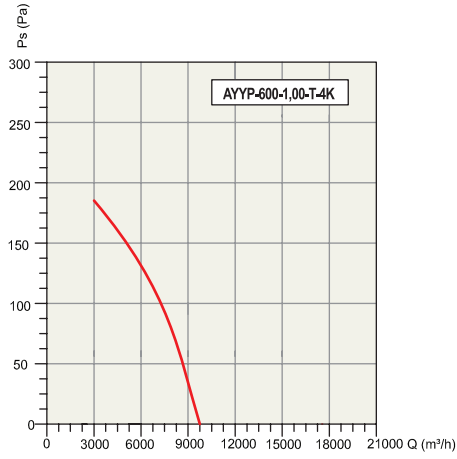

ACTIVENT®

Halkalı Merkez Mahallesi
Şehit Yılmaz Özdemir Caddesi
Sanayi Sokak No: 4
Küçükçekmece, İstanbul, Türkiye

P: +90.212 698 02 25

P: +90.212 698 02 26

P: +90.212 565 73 03

info@activent.com.tr

www.activent.com.tr

